PITBULL

COMPACT LOADERS

PRODUCT CATALOGUE



The Dutch Innovators

Introduction

Dear Reader,

You are holding the latest Pitbull catalogue, presenting our complete range of compact wheel loaders. In this edition, you will find an overview of all our machines and available options under the Pitbull brand name, part of Peeters Group. Each of our brands – Peecon, Tulip, and Pitbull – stands for quality, innovation, and reliability.

The Pitbull Loader is unique in its class. The machine is entirely manufactured in the Netherlands, in our state-of-the-art factory in Etten-Leur. By exclusively using high-grade A-brand components, we guarantee outstanding quality and long service life. New to our range: the folding roof, available for all Pitbull models. More information can be found at www.pitbullindustries.com.

Alongside this Pitbull Loaders catalogue, we are also introducing our new catalogues for Peecon Manure & Transport Technics, Peecon Feed Technics, and Tulip Arable Machinery. You can find them online at www.peecon.com and www.tulipindustries.com. Would you like to receive additional copies? Feel free to send an email to info@peetersgroup.com – we will send them to you free of charge.



Index

Introduction
Page 1

Index
Page 2

Pitbull Loader X-Series
Page 3-4



Pitbull Loader E-Series
Page 5-6




Pitbull Loader XS-Series
Page 7-8



Pitbull Loader XL-Series
Page 9-10



Pitbull Specifications
Page 11-12



Pitbull Lifting Specifications
Page 13

The **Pitbull Compact Loader X-Series**, thanks to its compact and lightweight design, is ideally suited for use on-site. The machine is easy to transport on a trailer. The fixed articulation point in combination with the oscillating rear axle ensures optimal stability and increased driving comfort, even on uneven terrain. The powerful performance, combined with the spacious seating position, makes this loader the ideal all-rounder.

All Pitbull Loaders come standard with a 55cc high-pressure hydraulic system. The high-pressure hydraulic system provides exceptional tractive power. The inching function (26V), cruise control, and hand throttle are among the high-end features that enable extremely precise control of the CRT machine. These functions are easily adjusted via the 7-inch touchscreen. The CRT models come standard with both Eco and Power modes, allowing efficient operation under light conditions or maximum power utilization for heavier tasks.

The X-Series is equipped as standard with the basic boom, offering the ideal balance between lifting height and lifting force. The boom is fitted with conical pins for a play-free construction. Thanks to the P–Z kinematics, the loader combines maximum breakout force with a perfect parallel guidance system.

Optionally, the X-Series is available with a spacious cabin, which, like the four-post canopy, is certified according to ROPS/FOPS standards. The Pitbull platform features a flat floor and low entry as standard, further enhancing comfort and accessibility.

The compact 4-cylinder Kubota engine is renowned for its reliability. A major advantage is the high torque at low RPM, resulting in fewer vibrations and more power under all conditions. In addition, the engine is easy to maintain and available in various power and emission classes. With the Stage V engines, you comply with all current emission standards.



Standard equipment

- 12,000 kg Dana Spicer axles with 45% differential locking on the front and rear axle
- X/XS/XL Series - 26V: Drive motor with fixed stroke volume
- X/XS/XL Series - 45/high speed: Variable drive motor
- Cardan shaft with disc brake
- Hydrostatic transmission
- 450 bar Linde high-pressured system
- Working hydraulics with a maximum output of 50 litres/min
- Hydraulic quick-change
- IBT cooler
- ROPS/FOPS safety roof
- Trelleborg 400/50-15 T463 tyres
- Sprayed in Pitbull red and chassis in Pitbull grey

Article number	Description
453-240-005	**Pitbull Compact Loader X24-26v**
453-250-005	**Pitbull Compact Loader X25-26v**
453-270-005	**Pitbull Compact Loader X27-26v**
451-240-005	**Pitbull Compact Loader X24-45CRT**
451-250-005	**Pitbull Compact Loader X25-45CRT**
451-270-005	**Pitbull Compact Loader X27-45CRT**
451-280-005	**Pitbull Compact Loader X28-45CRT**
450-908-010	Halogen lighting set
450-908-007	LED lighting set
450-908-008	LED bar in front (in gutter)
450-908-047	LED working lights front left and right
450-908-009	LED working lights at rear left and right
450-908-011-001	Flashing light 19 kW
450-908-011-002	Flashing light CRT
450-908-073	12 volt socket with 2-pin plug on the front
450-908-043	Acoustic signal during reversing
450-908-099	Trelleborg 400/50-15 T463 per 4 (= standard)
450-908-092	Alliance 280/70R16 Agristar II instead of Trelleborg 400/50-15 T463
450-908-085	BKT Giant Trax 12-16.5/14PR instead of Trelleborg 400/50-15 T463
450-908-068	BKT VF400/45R17.5 BKT FL693M per 4 instead of Trelleborg 400/50-15 T463
450-908-035	Deestone 31x15.50-15 D316 per 4 instead of Trelleborg 400/50-15 T463
450-908-100	Mitas 15.0/55-17 TR-01 TL 119/131A8 instead of Trelleborg 400/50-15 T463
450-908-087	Mitas 15.5-15 TR 07 TL 109/121A8 instead of Trelleborg 400/50-15 T463
450-908-024	Mitas 31x15.5 - 15 SK-02 per 4 instead of Trelleborg 400/50-15 T463
450-908-025	Mitas 31x15.50 - 15 TR-06 per 4 instead of Trelleborg 400/50-15 T463
450-908-027	Vredestein 400/60 - 15.5 IMP per 4 instead of Trelleborg 400/50-15 T463
450-908-084-002	High speed version 26 hp
450-908-002-002	100% diff. blocking on front axle, open-end diff. on rear axle 19kW CRT frame
450-908-002-003	100% diff. blocking on front axle, open-end diff. on rear axle CRT
450-908-003-002	1x DW, mechanically operated incl. electrical switch with bucket locking via a button on the steerin (not possible in combination with other 3th function)
450-908-003-003	1x DW, electrically operated via button on the joystick
450-908-003-006	1x DW, mechanically operated + 1x DW, electrically operated via button on joystick Incl. electrical switch with bucket locking via button on steering column
450-908-006	Inching, controlled on the joystick
450-908-044-002	One-sided detent of the 3rd function
450-908-045	Two-sided detent of the 3rd function
450-908-004-001	Non-pressurised oil return in front (not possible in combination with 450-908-004-002) (not possible in combination with 450-908-004-002)

Article number	Description
451-908-101	Leakage line in front
450-908-074-001	Boom suspension
450-908-067-002	Pallet forks 1200x100 mm
450-908-037-007	Bucket 160 cm EURO
450-908-037-001	Bucket 160 cm GIANT
450-908-037-002	Bucket 160 cm WEIDEMANN
450-908-037-003	Bucket 160 cm SCHÄFFER
450-908-037-006	Bucket 160 cm BOBCAT
450-908-033-001	Rock bucket 150 cm GIANT
450-908-005-007	Standard EURO coupling
450-908-005-001	GIANT coupling instead of standard EURO coupling
450-908-005-002	WEIDEMANN coupling instead of standard EURO coupling (instead of standard attachment)
450-908-005-003	SCHÄFFER coupling instead of standard EURO coupling (instead of standard attachment)
450-908-005-004	JLG coupling instead of standard EURO coupling
450-908-005-005	THALER coupling instead of standard EURO coupling
450-908-005-006	BOBCAT coupling instead of standard EURO coupling
450-908-005-009	SMS TRIMA coupling instead of standard EURO coupling
450-908-015-001	Towball
450-908-015-002	Combi tow hitch with ball and pin
450-908-016	12 volt connection for trailing lighting at the back
450-908-020-xxx	Other RAL colour instead of Pitbull red
450-908-076-001	Closed cabin including heating
465-908-014-001	Front and back window mounted on ROPS / FOPS safety roof
450-908-111-001	Foldable safety roof 19kW
450-908-111-002	Foldable safety roof CRT
450-908-054-002	Licence plate holder with lighting against the roof
450-908-054-001	License plate holder with lighting on motor bonnet
450-908-017	Locks on the hoods
450-908-012	Mirrors
450-908-018-001	Fuel cap without lock
450-908-018-002	Fuel cap with lock
450-908-013	Package for road admission (RDW Netherlands)
967-450-046	Maintance package Pitbull V1505 X-serie-26v at 50 hours
967-450-047	Maintance package Pitbull V1505 X-serie-26v at 250 hours
967-450-048	Maintance package Pitbull V1505 X-serie-26v at 750 hours or yearly
967-450-049	Maintance package Pitbull V1505 CRT at 50 hours
967-450-050	Maintance package Pitbull V1505 CRT at 250 hours
967-450-051	Maintance package Pitbull V1505 CRT at 500 hours or yearly



Thanks to its compact and lightweight design, the **Pitbull Compact Loader E-Series** is perfectly suited for on-site use. The machine is easy to transport on a trailer. The fixed articulation point combined with the oscillating rear axle ensures optimal stability and increased driving comfort, even on rough terrain. The powerful performance, combined with the spacious seating position, makes this loader the ideal all-rounder.

The Pitbull E-Series comes standard with two electric motors: one for the drive system and one for the working hydraulics. The electric drive motor delivers high torque and enables stepless acceleration from 0 to 20 km/h. Thanks to the energy recovery system, braking energy is efficiently recovered and stored in the battery. The quiet gear pump provides a hydraulic flow of up to 60 l/min, ensuring powerful and precise operation.

The Pitbull 50E is equipped as standard with a 30 kWh – 96 V LiFePO4 battery made from high-quality cells. The machine features a 3.3 kW on-board charger and can optionally be equipped with a fast charger, allowing the battery to be fully charged in just three hours.

The electronically controlled working hydraulics enable extremely precise control of the boom and bucket movements. The gear pump is efficiently managed and automatically adjusts the speed to minimize power consumption and maximize available battery capacity.

Via the 7-inch touchscreen, the operator can customize all settings. The 50E models come standard with both Eco and Power modes, allowing energy-efficient operation when desired or maximum performance under demanding conditions.

The E-Series comes standard with the basic boom, offering the perfect balance between lifting height and lifting force. The boom is fitted with conical pins for a play-free construction. Thanks to the P–Z kinematics, the loader combines maximum breakout force with a parallel guidance system.

Optionally, the E-Series can be equipped with a spacious cabin, which – like the four-post canopy – is certified according to ROPS/FOPS standards. The Pitbull platform features a flat floor and a low entry as standard, providing maximum comfort and ease of use.



Standard equipment

- 12,000 kg Dana Spicer axles with 45% differential locking on the front and rear axle
- 230 V - 3.3 kW integrated battery charger
- 30 kWh lithium battery
- Cardan shaft with disc brake
- Working hydraulics with a maximum output of 60 litres/min
- Hydraulic quick-change
- Cooling of work hydraulics
- ROPS/FOPS safety roof
- Trelleborg 400/50-15 T463 tyres
- Sprayed in Pitbull green and chassis in Pitbull grey



Article number	Description
465-240-001	**Pitbull Compact Loader X24-50e**
465-270-001	**Pitbull Compact Loader X27-50e**
465-908-008	LED bar in front (in gutter)
465-908-007	LED lighting set
465-908-062	LED worklight in front the optional short boom
465-908-047	LED working lights front left and right
465-908-009	LED working lights at rear left and right
465-908-011-003	Flashing light E
465-908-073	12 volt socket with 2-pin plug on the front
465-908-043	Acoustic signal during reversing
465-908-069	29.8 KwH battery pack instead of 19.8 KwH
465-908-081-002	Quick charger 50 A, mains connection 16 A
465-908-081-003	Charger 220V, Type 2 charging
465-908-081-004	Quickcharger 380V, Type 2 charging
465-908-099	Trelleborg 400/50-15 T463 per 4 (= standard)
465-908-092	Alliance 280/70R16 Agristar II instead of Trelleborg 400/50-15 T463
465-908-085	BKT Giant Trax 12-16.5/14PR instead of Trelleborg 400/50-15 T463
465-908-068	BKT VF400/45R17.5 BKT FL693M per 4 instead of Trelleborg 400/50-15 T463
465-908-035	Deestone 31x15.50-15 D316 per 4 instead of Trelleborg 400/50-15 T463
465-908-100	Mitas 15.0/55-17 TR-01 TL 119/131A8 instead of Trelleborg 400/50-15 T463
465-908-087	Mitas 15.5-15 TR 07 TL 109/121A8 instead of Trelleborg 400/50-15 T463
465-908-024	Mitas 31x15.5 - 15 SK-02 per 4 instead of Trelleborg 400/50-15 T463
465-908-025	Mitas 31x15.50 - 15 TR-06 per 4 instead of Trelleborg 400/50-15 T463
465-908-027	Vredestein 400/60 - 15.5 IMP per 4 instead of Trelleborg 400/50-15 T463
465-908-079	1x DW hydraulic function, operated proportionally in the joystick
465-908-080	2x DW hydraulic function, operated proportionally in the joystick
465-908-004-001	Non-pressurised oil return in front (not possible in combination with 450-908-004-002)
465-908-101	Leakage line in front
465-908-106-001	Manifold pressure relief AUX2 - 4th function
465-908-106-002	Manifold pressure relief AUX2 - 4th function + leakage line
450-908-074-003	Boom suspension
465-908-067-002	Pallet forks 1200x100 mm
465-908-005-001	GIANT coupling instead of standard EURO coupling
465-908-005-002	WEIDEMANN coupling instead of standard EURO coupling
465-908-005-003	SCHÄFFER coupling instead of standard EURO coupling
465-908-005-004	JLG coupling instead of standard EURO coupling
465-908-005-005	THALER coupling instead of standard EURO coupling
465-908-005-006	BOBCAT coupling instead of standard EURO coupling
465-908-015-001	Towball
465-908-015-002	Combi tow hitch with ball and pin
465-908-016	12 volt connection for trailing lighting at the back
465-908-051-xxx	Other RAL colour instead of Pitbull green
465-908-076-003	Closed cabin including heating
465-908-014-002	Front and rear window fitted to ROPS/FOPS safety roof including windscreen wiper
465-908-111-003	Foldable safety roof E
465-908-054-002	Licence plate holder with lighting against the roof
465-908-054-001	Licence plate holder with lighting on motor bonnet
465-908-017	Locks on the hoods
465-908-012	Mirrors
465-908-013	Registration RDW, only possible with lighting set, mirrors and licence plate holder with lighting
450-908-037-007	Bucket 160 cm EURO
450-908-037-001	Bucket 160 cm GIANT
450-908-037-002	Bucket 160 cm WEIDEMANN
450-908-037-003	Bucket 160 cm SCHÄFFER
450-908-033-001	Rock bucket 150 cm GIANT

Thanks to its compact and lightweight design, the **Pitbull Compact Loader XS-Series** is ideally suited for on-site use. The machine is easy to transport on a trailer. The fixed articulation point in combination with the oscillating rear axle ensures excellent stability and increased driving comfort, even on rough terrain. The powerful performance, together with the spacious seating position, makes this loader the ideal all-rounder.

All Pitbull Loaders come standard with a 55cc high-pressure hydraulic system. The high-pressure hydraulic system provides impressive tractive force. The inching function (26V), cruise control, and hand throttle are among the high-end features that allow extremely precise control of the CRT machine. These settings can be easily adjusted via the 7-inch touchscreen. The CRT models are equipped as standard with both Eco and Power modes, enabling energy-efficient operation or maximum performance under demanding conditions.

The XS-Series is equipped with a short boom that offers exceptionally high lifting capacity. This boom features reinforced pin-bushing connections, allowing it to handle heavy loads with ease. Thanks to the P-kinematics, the machine combines maximum lifting force with a parallel guidance system – ideal for safely lifting and moving heavy pallets or other dense materials.

Optionally, the XS-Series can be fitted with a spacious cabin, which – like the four-post canopy – is certified according to ROPS/FOPS standards. The Pitbull platform comes standard with a flat floor and low entry, further enhancing comfort and accessibility.

The compact 4-cylinder Kubota engine is known for its reliability and durability. A key advantage is the high torque at low engine speed, resulting in fewer vibrations and optimal performance under all conditions. The engine is easy to maintain and available in various power and emission classes. With the Stage V engines, you fully comply with current emission standards.



Standard equipment

- 12,000 kg Dana Spicer axles with 45% differential locking on the front and rear axle
- Short boom for additional lifting capacity up to 2,500 kg
- X/XS/XL Series - 26V: Drive motor with fixed stroke volume
- X/XS/XL Series - 45/high speed: Variable drive motor
- Cardan shaft with disc brake
- Hydrostatic transmission
- 450 bar Linde high-pressured system
- Working hydraulics with a maximum output of 50 litres/min
- Hydraulic quick-change
- IBT cooler
- ROPS/FOPS safety roof
- Deestone heavy-duty tyres
- Sprayed in Pitbull red and chassis in Pitbull grey

Article number	Description
453-240-006	**Pitbull Compact Loader XS24-26v with a short boom**
453-250-006	**Pitbull Compact Loader XS25-26v with a short boom**
453-270-006	**Pitbull Compact Loader XS27-26v with a short boom**
451-240-006	**Pitbull Compact Loader XS24-45CRT with a short boom**
451-250-006	**Pitbull Compact Loader XS25-45CRT with a short boom**
451-270-006	**Pitbull Compact Loader XS27-45CRT with a short boom**
451-280-006	**Pitbull Compact Loader XS28-45CRT with a short boom**
450-908-010	Halogen lighting set
450-908-007	LED lighting set
450-908-008	LED bar in front (in gutter)
450-908-062	LED worklight in front the optional short boom
450-908-047	LED working lights front left and right
450-908-009	LED working lights at rear left and right
450-908-011-001	Flashing light 19 kW
450-908-011-002	Flashing light CRT
450-908-073	12 volt socket with 2-pin plug on the front
450-908-043	Acoustic signal during reversing
450-908-099	Trelleborg 400/50-15 T463 per 4 (= standard)
450-908-092	Alliance 280/70R16 Agristar II instead of Trelleborg 400/50-15 T463
450-908-085	BKT Giant Trax 12-16.5/14PR instead of Trelleborg 400/50-15 T463
450-908-068	BKT VF400/45R17.5 BKT FL693M per 4 instead of Trelleborg 400/50-15 T463
450-908-035	Deestone 31x15.50-15 D316 per 4 instead of Trelleborg 400/50-15 T463
450-908-100	Mitas 15.0/55-17 TR-01 TL 119/131A8 instead of Trelleborg 400/50-15 T463
450-908-087	Mitas 15.5-15 TR 07 TL 109/121A8 instead of Trelleborg 400/50-15 T463
450-908-024	Mitas 31x15.5 - 15 SK-02 per 4 instead of Trelleborg 400/50-15 T463
450-908-025	Mitas 31x15.50 - 15 TR-06 per 4 instead of Trelleborg 400/50-15 T463
450-908-027	Vredestein 400/60 - 15.5 IMP per 4 instead of Trelleborg 400/50-15 T463
450-908-084-002	High speed version 26 hp
450-908-002-002	100% diff. blocking on front axle, open-end diff. on rear axle 19kW CRT frame
450-908-002-003	100% diff. blocking on front axle, open-end diff. on rear axle CRT
450-908-003-002	1x DW, mechanically operated incl. electrical switch with bucket locking via a button on the steerin (not possible in combination with other 3th function)
450-908-003-003	1x DW, electrically operated via button on the joystick
450-908-003-006	1x DW, mechanically operated + 1x DW, electrically operated via button on joystick Incl. electrical switch with bucket locking via button on steering column
450-908-006	Inching, controlled on the joystick
450-908-044-002	One-sided detent of the 3rd function
450-908-045	Two-sided detent of the 3rd function

Article number	Description
450-908-004-001	Non-pressurised oil return in front (not possible in combination with 450-908-004-002) (not possible in combination with 450-908-004-002)
451-908-101	Leakage line in front
451-908-102	Hose breakage protection
450-908-074-001	Boom suspension
450-908-067-002	Pallet forks 1200x100 mm
450-908-037-007	Bucket 160 cm EURO
450-908-037-001	Bucket 160 cm GIANT
450-908-037-003	Bucket 160 cm SCHÄFFER
450-908-037-002	Bucket 160 cm WEIDEMANN
450-908-037-006	Bucket 160 cm BOBCAT
450-908-033-001	Rock bucket 150 cm GIANT
450-908-005-007	Standard EURO coupling
450-908-005-001	GIANT coupling instead of standard EURO coupling
450-908-005-002	WEIDEMANN coupling instead of standard EURO coupling (instead of standard attachment)
450-908-005-003	SCHÄFFER coupling instead of standard EURO coupling (instead of standard attachment)
450-908-005-004	JLG coupling instead of standard EURO coupling
450-908-005-005	THALER coupling instead of standard EURO coupling
450-908-005-006	BOBCAT coupling instead of standard EURO coupling
450-908-005-009	SMS TRIMA coupling instead of standard EURO coupling
450-908-015-001	Towball
450-908-015-002	Combi tow hitch with ball and pin
450-908-016	12 volt connection for trailing lighting at the back
450-908-020-xxx	Other RAL colour instead of Pitbull red
450-908-076-001	Closed cabin including heating
465-908-014-001	Front and back window mounted on ROPS / FOPS safety roof
450-908-111-001	Foldable safety roof 19kW
450-908-111-002	Foldable safety roof CRT
450-908-054-002	Licence plate holder with lighting against the roof
450-908-054-001	License plate holder with lighting on motor bonnet
450-908-017	Locks on the hoods
450-908-012	Mirrors
450-908-018-002	Fuel cap with lock
450-908-013	Package for road admission (RDW Netherlands)



Thanks to its compact and lightweight design, the **Pitbull Compact Loader XL-Series** is ideally suited for on-site use. The machine is easy to transport on a trailer. The fixed articulation point in combination with the oscillating rear axle ensures excellent stability and increased driving comfort, even on rough terrain. The powerful performance, combined with the spacious seating position, makes this loader the ideal all-rounder.

All Pitbull Loaders come standard with a 55cc high-pressure hydraulic system. The high-pressure hydraulic system provides impressive tractive force. The inching function (26V), cruise control, and hand throttle are among the high-end features that allow extremely precise control of the CRT machine. These settings can easily be adjusted via the 7-inch touchscreen. The CRT models come standard with both Eco and Power modes, allowing you to operate efficiently or utilize full power under demanding conditions.

The XL-Series is equipped with a long boom that provides greater lifting height. This boom features reinforced pin-bushing connections for maximum durability. Thanks to the P-kinematics, the loader offers a parallel guidance system, ensuring safe and stable operation at height. The machine is ideal for lifting and moving loads up to 3.20 meters high.

Optionally, the XL-Series can be fitted with a spacious cabin, which – like the four-post canopy – is certified according to ROPS/FOPS standards. The Pitbull platform features a flat floor and low entry as standard, providing optimal comfort and ease of use.

The compact 4-cylinder Kubota engine guarantees reliability and power. With its high torque at low engine speed, the engine performs smoothly and with minimal vibration under all conditions. In addition, the engine is easy to maintain and available in various power and emission classes. With the Stage V engines, you fully comply with all current emission standards.



Standard equipment


- 12,000 kg Dana Spicer axles with 45% differential locking on the front and rear axle
- Long boom for additional lifting height up to 3.2 metres
- X/XS/XL Series - 26V: Drive motor with fixed stroke volume
- X/XS/XL Series - 45/high speed: Variable drive motor
- Cardan shaft with disc brake
- Hydrostatic transmission
- 450 bar Linde high-pressured system
- Working hydraulics with a maximum output of 50 litres/min
- Hydraulic quick-change
- IBT cooler
- ROPS/FOPS safety roof
- Trelleborg 400/50-15 T463 tyres
- Sprayed in Pitbull red and chassis in Pitbull grey

Article number	Description
453-240-007	**Pitbull Compact Loader XL24-26v with a long boom**
453-250-007	**Pitbull Compact Loader XL25-26v with a long boom**
453-270-007	**Pitbull Compact Loader XL27-26v with a long boom**
451-240-007	**Pitbull Compact Loader XL24-45CRT with a long boom**
451-250-007	**Pitbull Compact Loader XL25-45CRT with a long boom**
451-270-007	**Pitbull Compact Loader XL27-45CRT with a long boom**
451-280-007	**Pitbull Compact Loader XL28-45CRT with a long boom**
450-908-010	Halogen lighting set
450-908-007	LED lighting set
450-908-008	LED bar in front (in gutter)
450-908-047	LED working lights front left and right
450-908-009	LED working lights at rear left and right
450-908-011-001	Flashing light 19 kW
450-908-011-002	Flashing light CRT
450-908-073	12 volt socket with 2-pin plug on the front
450-908-043	Acoustic signal during reversing
450-908-099	Trelleborg 400/50-15 T463 per 4 (= standard)
450-908-092	Alliance 280/70R16 Agristar II instead of Trelleborg 400/50-15 T463
450-908-085	BKT Giant Trax 12-16.5/14PR instead of Trelleborg 400/50-15 T463
450-908-068	BKT VF400/45R17.5 BKT FL693M per 4 instead of Trelleborg 400/50-15 T463
450-908-035	Deestone 31x15.50-15 D316 per 4 instead of Trelleborg 400/50-15 T463
450-908-100	Mitas 15.0/55-17 TR-01 TL 119/131A8 instead of Trelleborg 400/50-15 T463
450-908-087	Mitas 15.5-15 TR 07 TL 109/121A8 instead of Trelleborg 400/50-15 T463
450-908-024	Mitas 31x15.5 - 15 SK-02 per 4 instead of Trelleborg 400/50-15 T463
450-908-025	Mitas 31x15.50 - 15 TR-06 per 4 instead of Trelleborg 400/50-15 T463
450-908-027	Vredestein 400/60 - 15.5 IMP per 4 instead of Trelleborg 400/50-15 T463
450-908-084-002	High speed version 26 hp
450-908-002-002	100% diff. blocking on front axle, open-end diff. on rear axle 19kW CRT frame
450-908-002-003	100% diff. blocking on front axle, open-end diff. on rear axle CRT
450-908-003-002	1x DW, mechanically operated incl. electrical switch with bucket locking via a button on the steerin (not possible in combination with other 3th function)
450-908-003-003	1x DW, electrically operated via button on the joystick
450-908-003-006	1x DW, mechanically operated + 1x DW, electrically operated via button on joystick Incl. electrical switch with bucket locking via button on steering column
450-908-006	Inching, controlled on the joystick
450-908-044-002	One-sided detent of the 3rd function
450-908-045	Two-sided detent of the 3rd function


Article number	Description
450-908-004-001	Non-pressurised oil return in front (not possible in combination with 450-908-004-002) (not possible in combination with 450-908-004-002)
453-908-101	Leakage line in front
450-908-074-001	Boom suspension
450-908-067-002	Pallet forks 1200x100 mm
450-908-037-007	Bucket 160 cm EURO
450-908-037-001	Bucket 160 cm GIANT
450-908-037-002	Bucket 160 cm WEIDEMANN
450-908-037-003	Bucket 160 cm SCHÄFFER
450-908-037-006	Bucket 160 cm BOBCAT
450-908-033-001	Rock bucket 150 cm GIANT
450-908-005-001	GIANT coupling instead of standard EURO coupling
450-908-005-002	WEIDEMANN coupling instead of standard EURO coupling (instead of standard attachment)
450-908-005-003	SCHÄFFER coupling instead of standard EURO coupling (instead of standard attachment)
450-908-005-004	JLG coupling instead of standard EURO coupling
450-908-005-005	THALER coupling instead of standard EURO coupling
450-908-005-006	BOBCAT coupling instead of standard EURO coupling
450-908-005-009	SMS TRIMA coupling instead of standard EURO coupling
450-908-015-001	Towball
450-908-015-002	Combi tow hitch with ball and pin
450-908-016	12 volt connection for trailing lighting at the back
450-908-020-xxx	Other RAL colour instead of Pitbull red
450-908-076-001	Closed cabin including heating
450-908-054-002	Licence plate holder with lighting against the roof
450-908-054-001	License plate holder with lighting on motor bonnet
450-908-017	Locks on the hoods
450-908-012	Mirrors
450-908-018-001	Fuel cap without lock
465-908-014-001	Front and back window mounted on ROPS / FOPS safety roof
450-908-111-001	Foldable safety roof 19kW
450-908-111-002	Foldable safety roof CRT
450-908-018-002	Fuel cap with lock
450-908-013	Package for road admission (RDW Netherlands)




X-Series

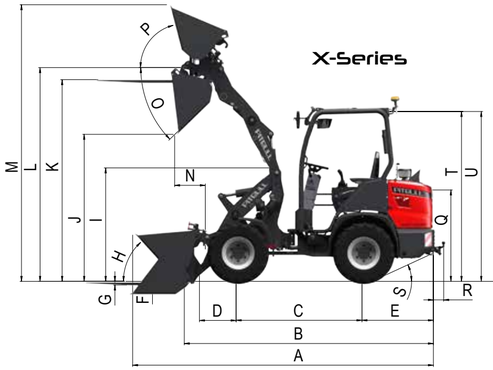


XS-Series

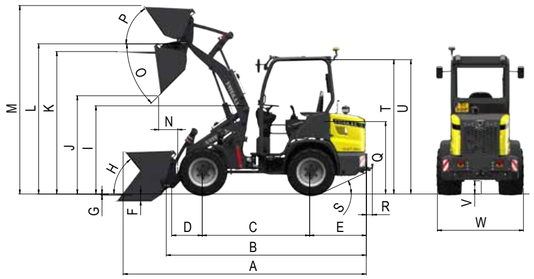



E-Series

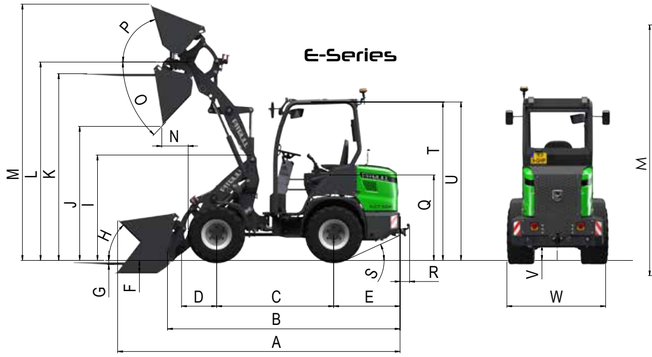

XL-Series

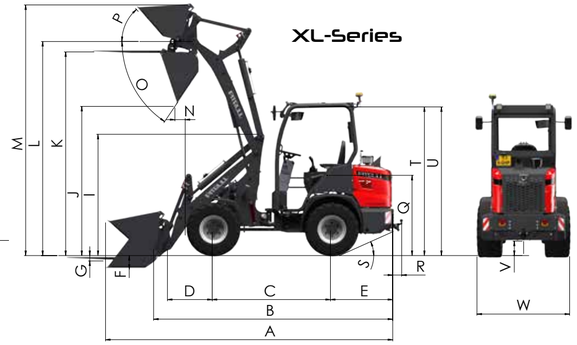












			X-series	E-series	XS-series	XL-series
Mark	Description	Unit				
A	Overall length with tray	mm	3880	3880	3960	4230
B	Overall length without tray	mm	3250	3250	3260	3530
C	Wheelbase	mm	1625	1625	1750	1750
D	Bucket pivot point to centre of front axle	mm	490	490	495	660
E	Centre to rear axle	mm	922	922	922	922
F	Underexcavacation standard tray	mm	160	160	110	200
G	Under excavacation pallet forks	mm	48	48	20	75
H	Bottom tilt angle	°	47,8	47,8	51	41,5
I	Height of front frame	mm	1470	1470	1450	1800
J	Max. dumping height	mm	1900	1900	1600	2290
K	Max. height of pallet forks	mm	2600	2600	2320	3020
L	Bucket pivot point (max. lifting height)	mm	2765	2765	2450	3170
M	Overall working height	mm	3575	3575	3070	3700
N	Reach at max. lifting height	mm	395	395	310	325
O	Tipping angle at max. lifting height	°	45	45	45	55
P	Inclination angle at max. height	°	75	75	55	49
Q	Seat height	mm	1180	1180	1180	1180
R	Towbar height	mm	133	133	133	133
S	Drive-up angle	mm	25	25	25	25
T	Canopy height	mm	2225	2225	2225	2225
U	Cabin height	mm	2270	2270	2270	2270
V	Ground clearance	mm	215	215	215	215
W	Width on standard tyre	mm	1375	1375	1400	1375
X	Inner turning circle	mm	2450	2450	2780	2780
Y	External turning radius without bucket	mm	5450	5450	5750	5750
Z	External radius with bucket	mm	6100	6100	6250	6500
β	Steering angle	°	45	45	45	45

Pitbull Lifting Specifications

Position		X524-45CRT	X525-45CRT	X527-45CRT	X528-45CRT
Rated operating capacity Pallet Forks	kg	1270	1360	1600	1660
Rated operating capacity General-Purpose Bucket	kg	800	850	1000	1035
Kiplast AA	kg	2750	2900	3250	3325
Kiplast BB	kg	2350	2500	2850	2925
Kiplast CC	kg	2050	2200	2550	2625
Kiplast DD	kg	1400	1505	1745	1795
Kiplast EE	kg	2285	2400	2700	2770
Kiplast FF	kg	1885	2000	2300	2370
Kiplast GG	kg	1585	1700	2000	2070
Kiplast HH	kg	1165	1250	1470	1525



Position		X24-45CRT	X27-45CRT	X28-45CRT
Rated operating capacity Pallet Forks	kg	920	1150	1250
Rated operating capacity General-Purpose Bucket	kg	575	720	780
Kiplast AA	kg	2370	2570	2830
Kiplast BB	kg	1970	2350	2430
Kiplast CC	kg	1670	2050	2130
Kiplast DD	kg	1200	1450	1500
Kiplast EE	kg	1850	2130	2250
Kiplast FF	kg	1450	1730	1850
Kiplast GG	kg	1150	1430	1550
Kiplast HH	kg	900	1100	1200

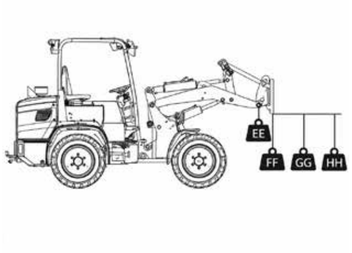

Position		XL24-45CRT	XL25-45CRT	XL27-45CRT	XL28-45CRT
Rated operating capacity Pallet Forks	kg	920	990	1150	1200
Rated operating capacity General-Purpose Bucket	kg	575	615	725	750
Kiplast AA	kg	2160	2280	2250	2610
Kiplast BB	kg	1760	1875	2150	2210
Kiplast CC	kg	1460	1575	1850	1910
Kiplast DD	kg	1080	1160	1370	1410
Kiplast EE	kg	1850	1935	2150	2200
Kiplast FF	kg	1450	1535	1750	1800
Kiplast GG	kg	1150	1235	1450	1500
Kiplast HH	kg	900	970	1135	1175



DISCOVER ALL THE BENEFITS ON OUR WEBSITE

www.peetersgroup.com

PEECON | TULIP | PITBULL

MADE IN HOLLAND



- Explore the complete product range of Peecon, Tulip and Pitbull online
- Always have real-time insight into the most competitive prices and offers
- Configure your machine with our online configurator
- Easily find your nearest dealer
- Access an extensive online library with brochures, manuals and parts catalogues

Scan and discover more online!

STAY CONNECTED VIA OUR SOCIALS

PEETERS GROUP
The Dutch innovators

Do you want more information about our products? Please contact us or visit our website.

2027-01 EN | WWW.PEETERSGROUP.COM | MUNNIKENHEIWEG 47 | 4879NE | ETTEN-LEUR | NETHERLANDS